


# 130 Series TRANSMIN BoomerHD RANGE

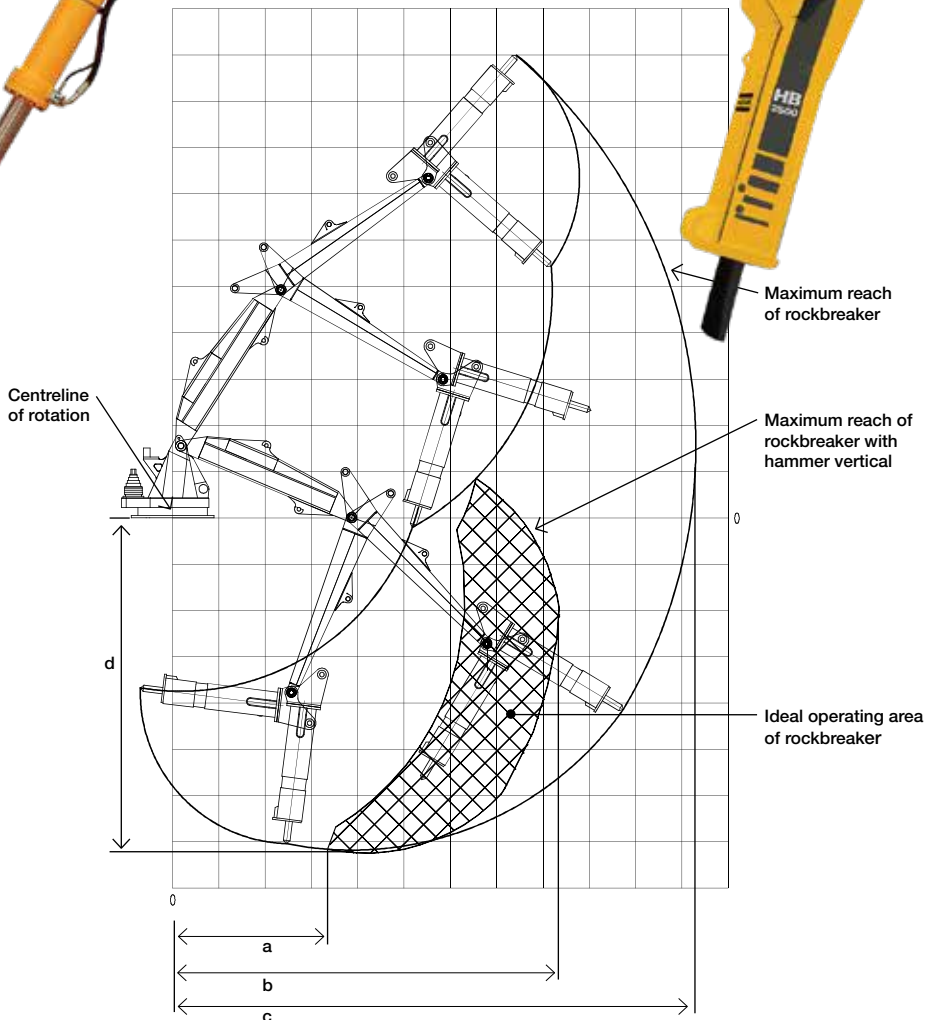

## BOOMERHD 130 SERIES

Vertical Reach*	up to 8.7m
Horizontal Reach	up to 13.8m
Rock UCS	100~320MPa

\* Hammer orientation vertical

## MODELS

	40-40	50-40	50-50	60-50
Horizontal reach from C/L of mount with hammer vertical (b)*	9.0m	9.9m	10.9m	11.9m
Maximum horizontal reach with hammer extended (c)	10.9m	11.8m	12.8m	13.8m
Vertical reach below base RL (d)*	7.0m	7.3m	8.3m	8.7m

## SLEW

Rotation angle	270° max 240° recommended
Method	Slew bearing with integral external gear
Drive type	Single hydraulically driven gearbox
Speed	2.93 RPM
Torque	121 kNm

## CONSTRUCTION

Slew frame	High tensile steel
Boom	High tensile steel
Jib	High tensile steel
Hammer bracket	High tensile steel
Pivot pins & bushes	Harden and tempered high tensile steel

## GREASING

Type	Manual
Boom	Grease nipples on pivot pins, cylinder pins, slew components
Hammer	OEM Cartridge system

## FASTENERS

General	Metric grade 8.8 minimum, zinc plated (except for proprietary components)
---------	---

## HYDRAULICS

Control valve	Radio activated proportional control with load sensing
Solenoids	24 VDC
Boom max pressure	330 bar relief valve protection in control valve
Hammer max pressure	220 bar relief valve protection in control valve
Cylinders	Transmin heavy duty design and manufacture with cushions, spherical bearings and chrome plated cylinder rods

	Bore Dia	Rod Dia	Stroke
Boom 1 off 40-40 & 50-40	180mm	125mm	1350mm
50-50 & 60-50	200mm	140mm	1340mm
Jib 1 off	180mm	125mm	1200mm
Hammer 1 off	150mm	115mm	1080mm

Pressure pipes	Seamless carbon steel to ASTM A53/ASTM A106/API 5L
----------------	--

Pressure hoses	To SAE100 R12 & R13 as applicable
----------------	-----------------------------------

Fittings	SAE code 61 and code 62, JIC as applicable
----------	--

## OPTIONS

Installation hoses	5.5m hose kit for construction to site run piping
Isolation valves	Interconnection between site run piping and rockbreaker hoses
Hose support stand and bunch binder	Ensures hosing connected at the rockbreaker base is adequately restrained
Boom locking kit	Burst hose protection on boom and jib cylinders
Soft slew limiting	Limits slew travel to reduce equipment interaction
HVOF cylinder rod coating	Prolongued cylinder life
Radio controller fixed stand	Permanent mounting for radio controller including permanent power and cable options
Automatic greasing	8L capacity grease unit mounted on HPU
Automation ready kit	RockLogic™ readiness - simple upgrade path

All products, specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Information contained herein is for planning purposes only. Please contact Transmin for application specific or certified design data.



## HEAD OFFICE

### Western Australia

Local Call: 1300 127 091

International Call: +61 (0) 8 9270 8555

Email: wasales@transmin.com.au

Address: 33-37 Denninup Way Malaga  
Perth, Western Australia, 6090

### Queensland & Northern Territory

Local Call: 1300 800 609

International Call: +61 (0) 8 9270 8555

Email: qldsales@transmin.com.au

## INTERNATIONAL OFFICES

North America Email: sales.ca@transmin.com.au

South America Email: sales.sa@transmin.com.au

India Email: sales.in@transmin.in

[www.transmin.com.au](http://www.transmin.com.au)